


Technical Specifications - Sizing

US Gallons Per Minute (GPM)	15	20	25	35	50
Pounds	30	40	50	70	100
Litres Per Second (LPS)	0.94	1.26	1.6	2.2	3.2
Kilograms	13.6	18.1	22.7	31.8	45.4
Part Number	3915A02	3920A02	3925A03	3935A (**)	3950A (**)
Grease Capacity lbs (Kg) actual	65 (29.5)	70 (31.8)	74 (33.6)	115 (52.2)	122 (55.3)
Operating Temperature Capabilities	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)	220°F (104°C)
Surface Load Capacity	440 lbs (200 kgs)	440 lbs (200 kgs)	440 lbs (200 kgs)	440 lbs (200 kgs)	440 lbs (200 kgs)
Unit Weight Capacity (Empty)	23 lbs (10.4 kgs)	23 lbs (10.4 kgs)	23 lbs (10.4 kgs)	45 lbs (20.4 kgs)	60 lbs (27.2 kgs)
Liquid Capacity	21.6 gal (81.8L)	21.6 gal (81.8L)	21.6 gal (81.8L)	39.4 gal (149.1L)	52.0 gal (197 L)
Connection size (mechanical) (110 mm available on request)	2"	2"	3"	**3" (03) **4" (04)	**3" (03) **4" (04)

Dimensional-Tank

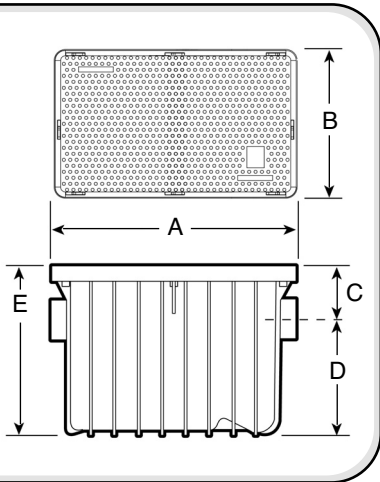

	GPM/lbs 15/30	20/40	25/50	35/70	50/100
A	23.6" (600mm)	23.6" (600mm)	23.6" (600mm)	31.0" (787mm)	31.0" (787mm)
B	17.5" (444mm)	17.5" (444mm)	17.5" (444mm)	23.5" (597mm)	23.5" (597mm)
C	3.5" (89mm)	3.5" (89mm)	4.1" (104mm)	5.0" (127mm)	5.0" (127mm)
D	12.8" (325mm)	12.8" (325mm)	12.2" (310mm)	12.5" (318mm)	18.5" (469.9 mm)
E	16.3" (414mm)	16.3" (414mm)	16.3" (414mm)	17.5" (444mm)	23.5" (596.9 mm)