

SPEAKMAN®

SE-603

Combination Shower & Eye/Face Wash

DESCRIPTION

SE-603 Safe-T-Zone® features the SE-400 eye/face wash with six aerated sprays and rectangular stainless steel bowl combined on a painted galvanized steel stanchion with an Impeller Action deluge showerhead which is activated by a high visibility yellow pull rod.

SPECIFICATIONS

SHOWER HEAD: 8" Dia. CYCOLAC® Yellow Plastic.

FLOW CONTROL: Internal 20gpm Regulator.

VALVE: 1" NPT Female Brass, Chrome-Plated. Full Flow Stay-Open Ball Valve.

ACTIVATOR: Powder Coated Yellow, Aluminum Triangular Pull Rod.

STANCHION: 1-1/4" IPS Steel Piping with Brass Fittings.

INLET & WASTE: 1-1/4" NPT Female.

FINISH: Safety Green Paint.

EYE/FACE WASH: SE-400

BOWL: 300 Series Stainless Steel SPRAY HEADS: (6) Brass, Chrome-Plated Aerated.


VALVE: 1/2" NPT Female Brass, Chrome-Plated.

ACTIVATOR: Stainless Steel Push Handle.

SHROUDS: Yellow Polypropylene.

INLET: 1/2" NPT Female.

STRAINER: Brass, Chrome-Plated, In-Line.

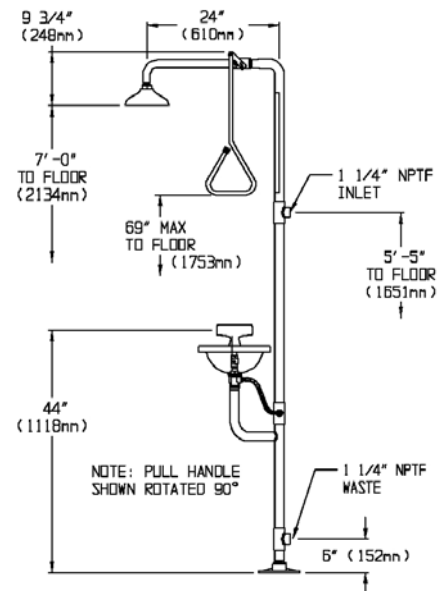

Universal Emergency Sign Included
Compliance: Meets ANSI Z358.1-1998

OPTIONS

- Hand Foot Operation (HFO)
- Freeze Protection Valve (FPV)
- Scald Protection Valve (SPV)
- Flow Switch (FLW)
- Hand Held Spray (HS)
- Top Supply (TS)
- Stainless Steel Shower Head (SSH)
- Stainless Steel Pull Rod (SPR)
- Stainless Steel Ball Valves (SSBV)
- Chrome Plated Brass Shower Head (BH)

Job Name _____
Location _____
Architect/Engineer _____
Sales Representative _____
Wholesaler _____
Date _____ Model # _____