

SPEAKMAN SAFETY PRODUCTS

Installation, Maintenance & Operation Instructions

SEF-9200 EYESAVER™ SERVICE SINK UNIT

DESCRIPTION

The SEF-9200 Eyesaver™ service sink unit is an independently operated wall mounted eyewash which attaches to a Speakman SC-5811 service sink fitting (not included). The eyewash offers twin sprays and flip top dust covers.

SPECIFICATIONS

OPERATION: Eyewash and sink fitting operate independently of each other

SUPPLY: Speakman SC-5811 service sink fitting (not included)

FINISH: Rough chrome plated brass

EYEWASH ACTIVATION: Squeeze valve with an automatic stay open device

EYEWASH SPRAYS: Dual spray faces


EYEWASH FLOW RATE: 2.4 GPM at 30 psi. flowing. See flow data chart on back for additional information.

PRESSURE: 30 psi. minimum flow pressure, 125 psi. maximum static pressure

APPROVALS: Meets ANSI Z358.1

SHIPPING WEIGHT: 5.7 LBS.

Note- The SEF-9200 Eyesaver™ service sink unit and the SC-5811-RCP service sink fitting can be purchased together as a SEF-9000 Eyesaver™ service sink fitting.

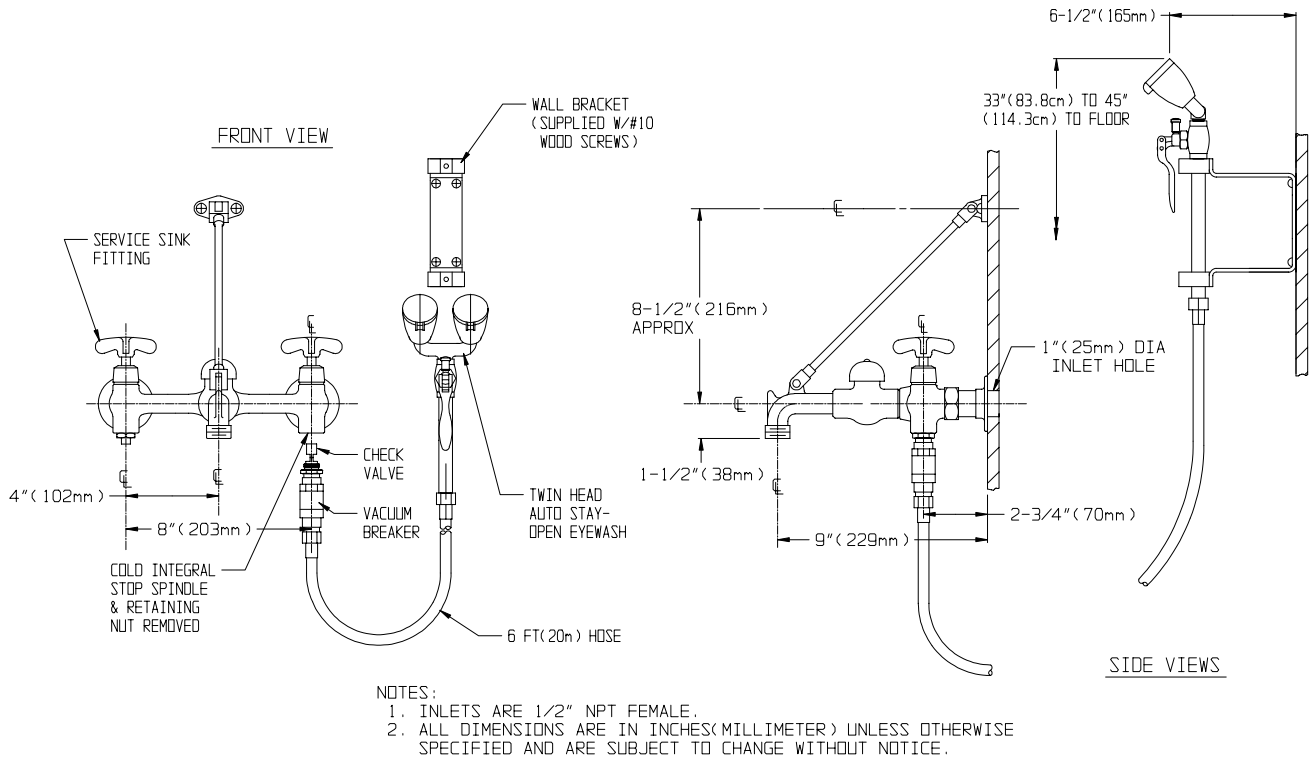


FLOW DATA

FLOW PRESSURE PSI (BAR)	30 (2.07)	40 (2.76)	50 (3.45)	60 (4.14)	70 (4.83)	80 (5.52)
EYEWASH ONLY: FLOW RATE GPM (LPM)	2.4 (9.1)	2.8 (10.6)	3.0 (11.4)	3.2 (12.1)	3.2 (12.3)	3.3 (12.6)
EYEWASH W/SINK FITTING FULL ON: FLOW RATE GPM (LPM)	2 (7.6)	2.4 (9.2)	2.7 (10.4)	3.0 (11.2)	3.1 (11.8)	3.2 (12.2)

IMPORTANT: The supply line for plumbed eyewash units shall provide an uninterrupted supply of flushing fluid at a minimum of 30 psi of flowing pressure. If a shut off valve is installed in the cold supply line of the sink fitting (which supplies the eyewash) for maintenance purposes, provisions shall be made to prevent unauthorized shut off.

PACKING LIST

Item	Description	Qty.	Item	Description	Qty.
1	Eyewash Assembly	1	3	Wall Bracket Group	1
2	Vacuum Breaker/Housing Assembly	1			

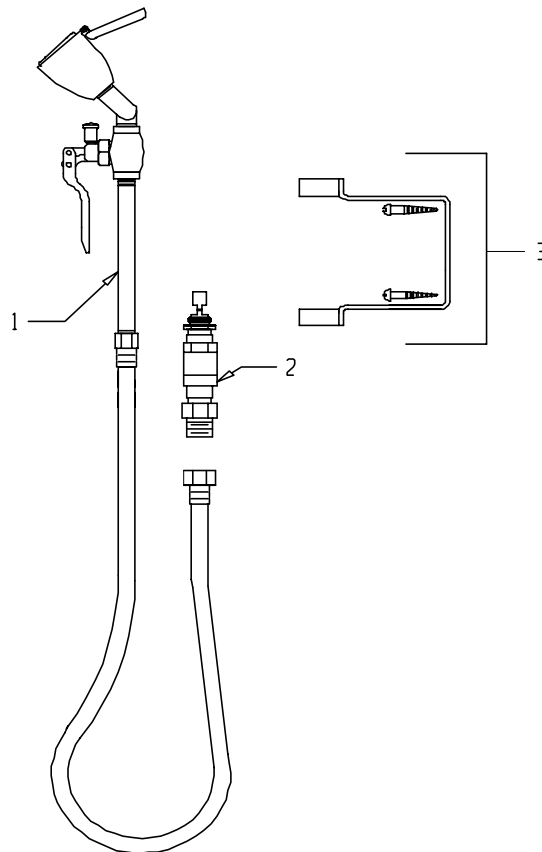

SPEAKMAN®

PO BOX 191 Wilmington, DE 19899

Phone 800-537-2107 Fax 800-977-2747

www.speakmancompany.com

11/02
92-2161

